

**SENATOR** HSS Tap & Drill Sets  
QUALITY TOOLING

Industrial quality. Ground flute, blue finish. Supplied in indexing metal case. Manufactured to **BS328 : Part 1 : 1986, DIN 338N & ANSI B94 -11M.**

**28 Piece Set Contents (mm):**  
**Taps:** (taper, second and bottom): M3, M4, M5, M6, M8, M10 and M12.  
**Drills:** 2.5, 3.3, 4.2, 5.0, 6.8, 8.5 and 10.2mm.



**HSS**  
**METRIC**

**x 0.7mm**  
2.5 ~ 10.2

**28**  
PIECES

**DIN 338** For Dimensions  
**BS 328** See Pages 32 - 33

Weight each Order Code  
SEN-025  
-9960K


**Multi-Purpose 'Dial-A-Drill' Set**

**18 Piece Drill Set**

Designed to satisfy countless tasks around the home and workshop - a drill bit for every job!. Supplied in a robust 'dial a drill' case for easy selection and compact storage.

**Contents:**

- 6 x wood drills with 'lip and spur' self centering/self starting points. Suitable for all types of timber. Sizes 3, 4, 5, 6, 8 and 10mm.
- 6 x masonry drills with TCT drill point. Suitable for tiles, ceramics and all light building materials. Sizes 3, 4, 5, 6, 8 and 10mm.
- 6 x HSS drills (Jobber) with roll forged flutes. Suitable for use in portable powertools in all types of materials. Sizes 3, 4, 5, 6, 8 and 10mm.

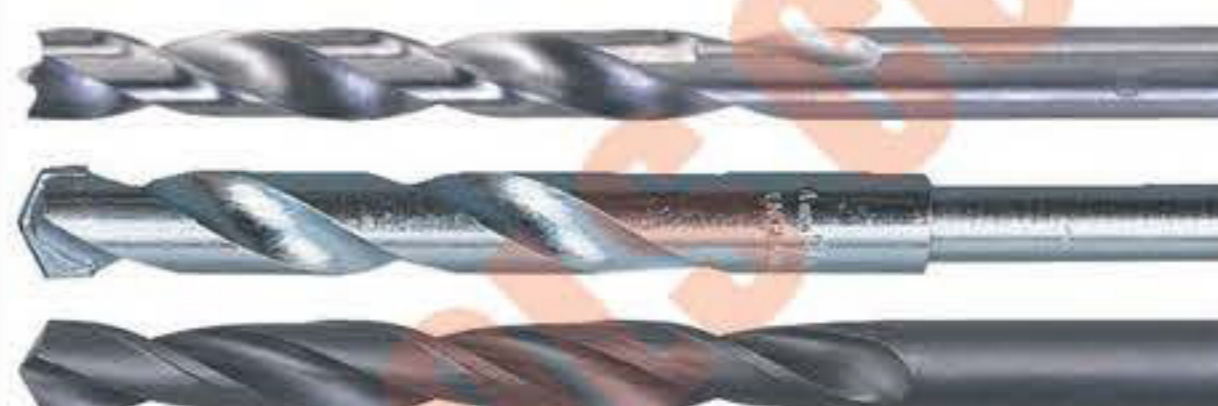

Weight each Order Code  
SEN-025  
-9500K



**18**  
PIECES

CUTTING TOOLS

**SHERWOOD** HSS Reduced Shank Drills (Blacksmiths)  
QUALITY CUTTING TOOLS

1/2" parallel shank. General purpose drills for light duty work, for drilling steels, cast iron, nickel brass and graphite. Reduced parallel shank 1/2". Point angle: 118°, helix angle: normal, web thickness: standard, tolerance of diameter: h8, tolerance of shank: 0.01/0.08. Manufactured to works standard.

**Black Oxidised Finish**

**Metric**

Diameter (mm)	Flute Length	Overall Length	Order Code SHR-025
13.00	78.0	150.0	-1805A
13.50	78.0	150.0	-1805B
14.00	78.0	150.0	-1806C
14.50	78.0	150.0	-1806D
15.00	78.0	150.0	-1807E
15.50	78.0	150.0	-1807F
16.00	78.0	150.0	-1808G
16.50	78.0	150.0	-1808H
17.00	78.0	150.0	-1809J
17.50	78.0	150.0	-1809K
18.00	78.0	150.0	-1810L
18.50	78.0	150.0	-1810M
19.00	78.0	150.0	-1811N
19.50	85.0	150.0	-1811P
20.00	85.0	150.0	-1812Q
21.00	85.0	150.0	-1813R
22.00	85.0	150.0	-1814S
23.00	85.0	150.0	-1815T
24.00	85.0	150.0	-1816V
25.00	85.0	150.0	-1817W
26.00	85.0	150.0	-1818X
27.00	85.0	150.0	-1819Y
28.00	85.0	150.0	-1820Z
29.00	85.0	150.0	-1821A
30.00	85.0	150.0	-1822B
32.00	85.0	150.0	-1824D



**Inch**

Diameter (Inch)	Flute Length	Overall Length	Order Code SHR-025
9/16"	3 1/16"	6"	-1764E
19/32"	3 1/16"	6"	-1766G
5/8"	3 1/16"	6"	-1768J
41/64"	3 1/16"	6"	-1769K
21/32"	3 1/16"	6"	-1770L
11/16"	3 1/16"	6"	-1772N
3/4"	3 1/16"	6"	-1776S
13/16"	3 3/8"	6"	-1780X
7/8"	3 3/8"	6"	-1784B
15/16"	3 3/8"	6"	-1788F
1"	3 3/8"	6"	-1792K
1 1/16"	3 3/8"	6"	-1794M
1 1/8"	3 3/8"	6"	-1796P
1 1/4"	3 3/8"	6"	-1800T

**HSS Reduced Shank Drill Set (Blacksmiths)**

**5 Piece Set Contents:**  
14, 16, 18, 20 and 22mm.

**5**  
PIECES



Number of Pieces Order Code  
SHR-025  
5 -8960K

**Bright Finish - TiN Tipped**



**HSS** **TiN-tip**

Diameter (mm)	Flute Length	Overall Length	Order Code SHR-025
14.00	78.0	150.0	-1736C
15.00	78.0	150.0	-1737E
16.00	78.0	150.0	-1738G

Diameter (mm)	Flute Length	Overall Length	Order Code SHR-025
17.00	78.0	150.0	-1739J
18.00	78.0	150.0	-1740L
19.00	78.0	150.0	-1741P

Diameter (mm)	Flute Length	Overall Length	Order Code SHR-025
20.00	85.0	150.0	-1742Q
22.00	85.0	150.0	-1744S
25.00	85.0	150.0	-1747W

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**